


1/16 22 -10 16 14 Î 10 Î -11 24 16-} 14 18-10 Î 20 -16-22-7 14 $\langle \rangle$ 1

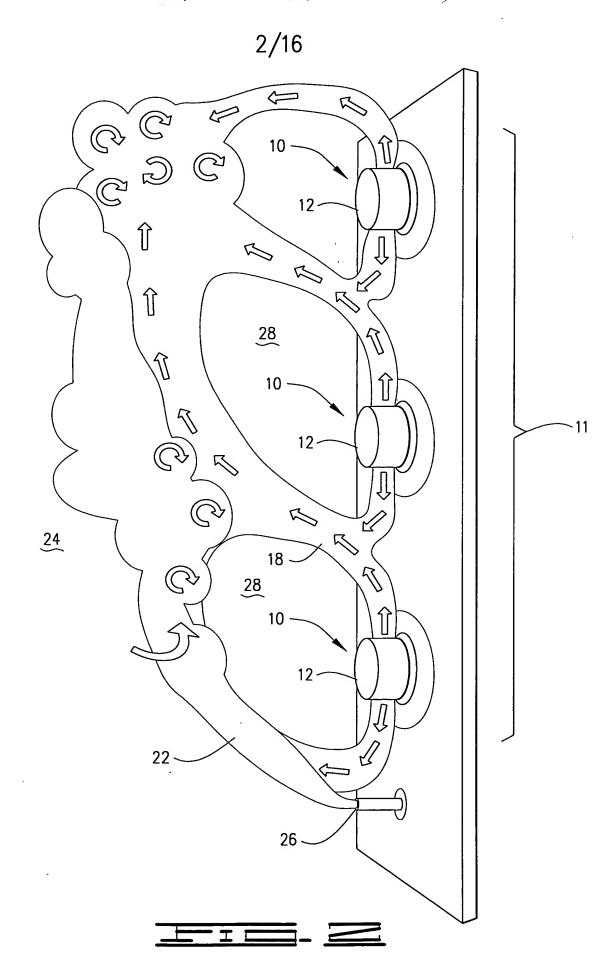


|

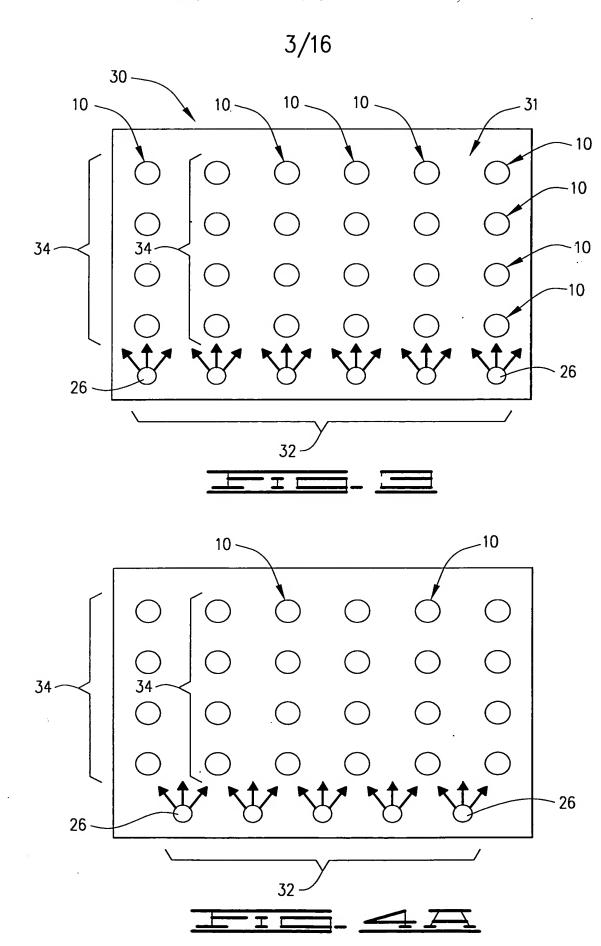


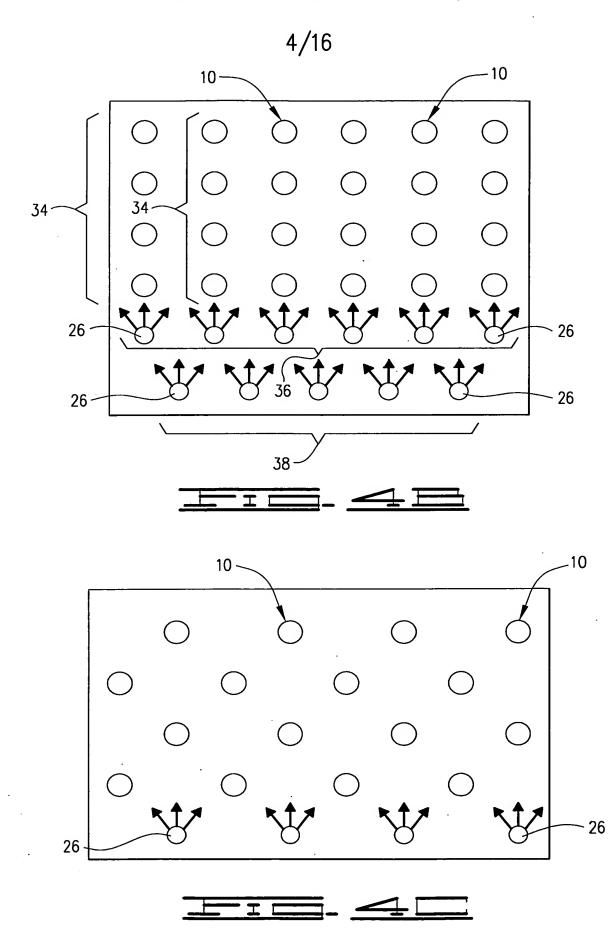


5/16

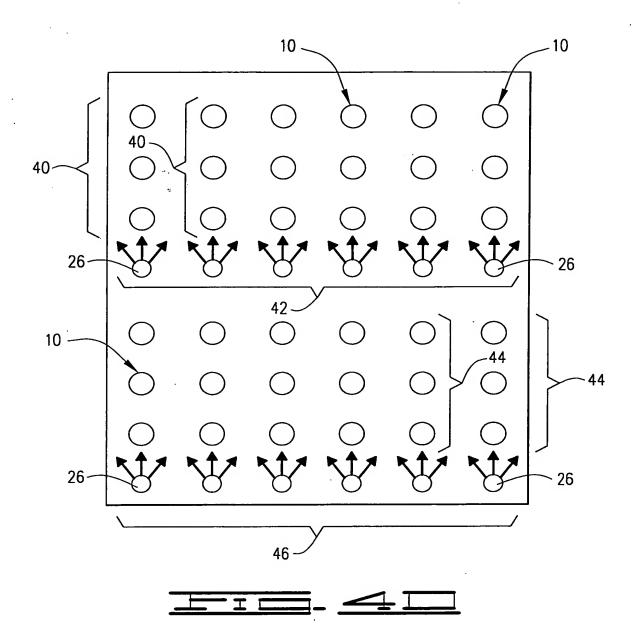





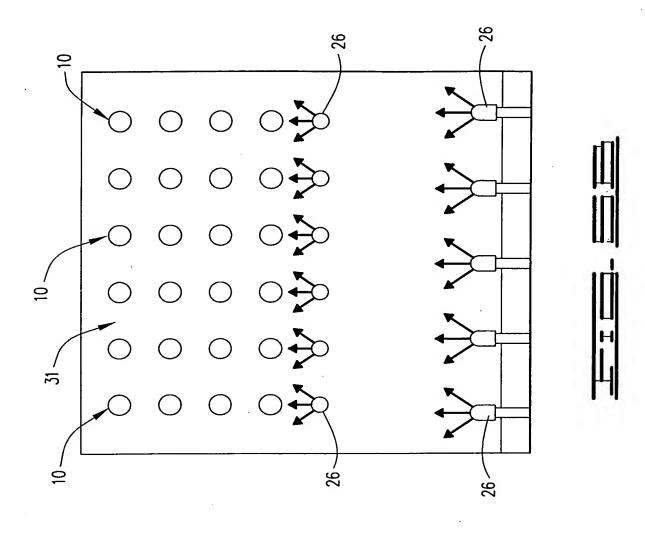

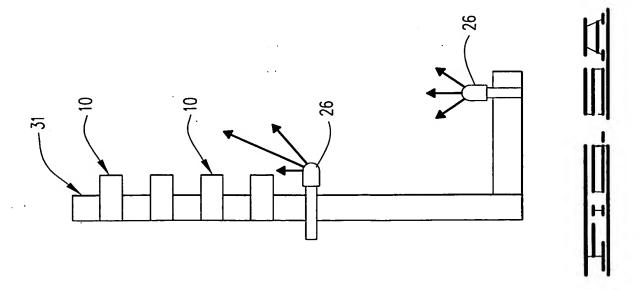



7/16

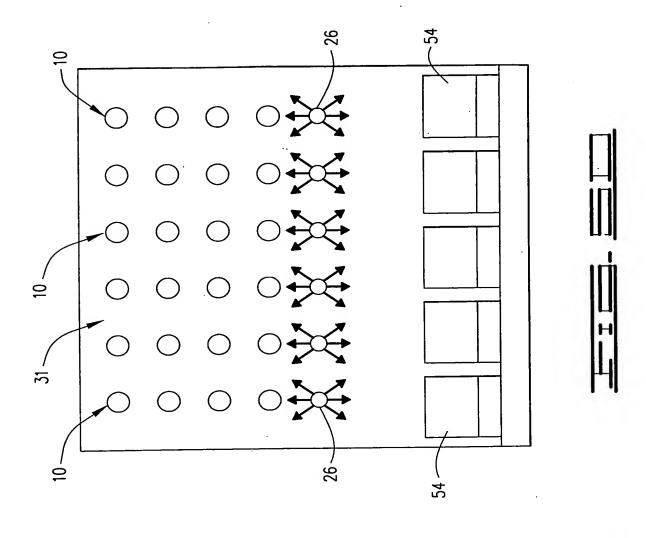

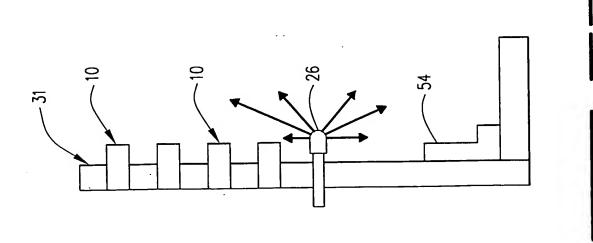


8/16

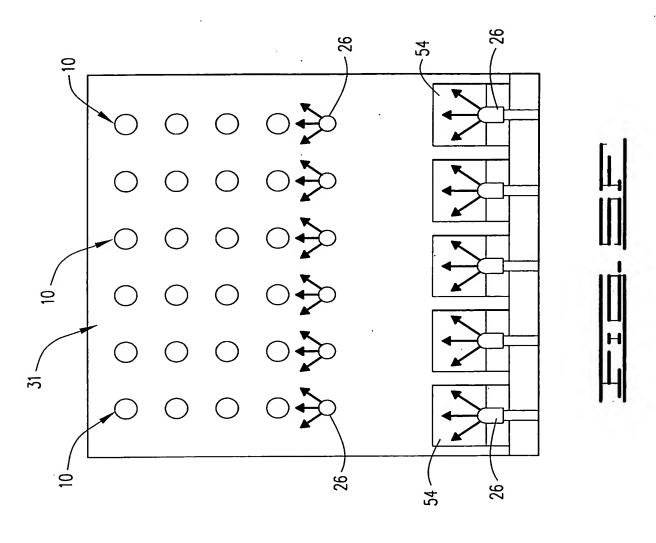

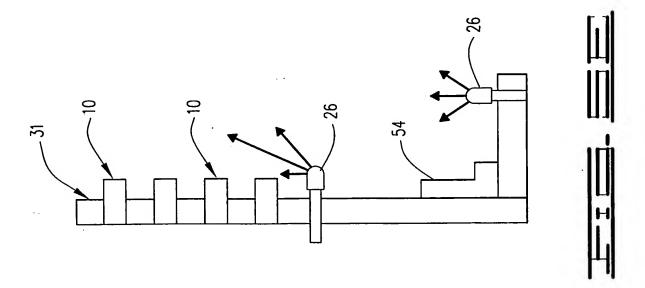



9/16

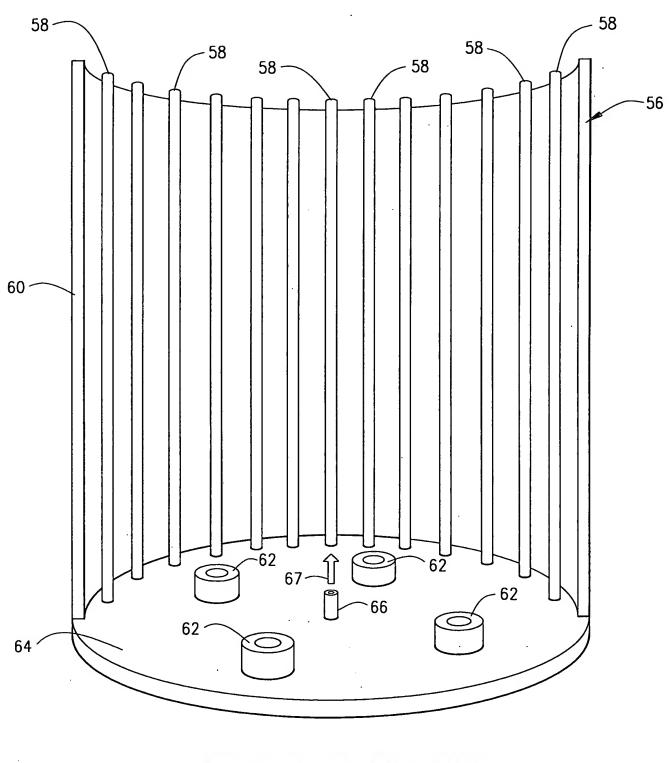




10/16

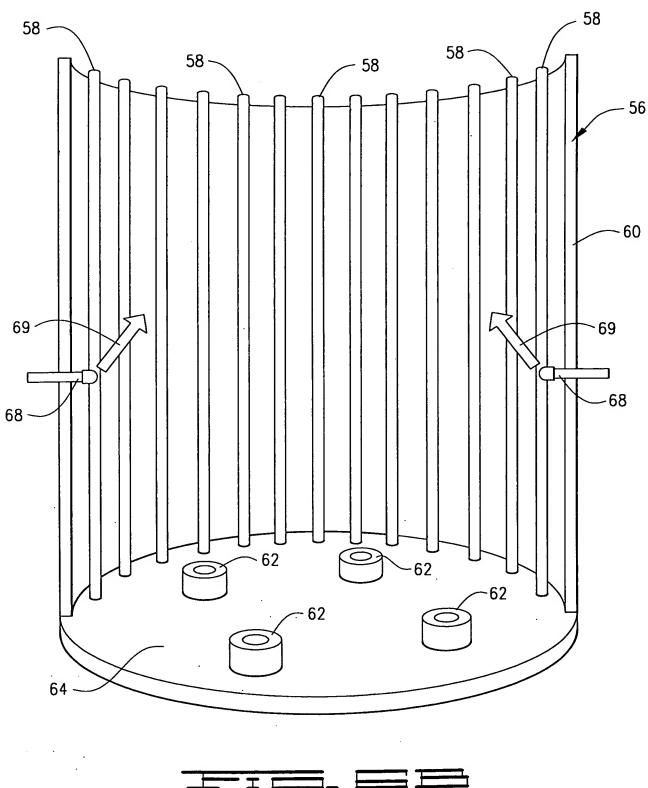





11/16

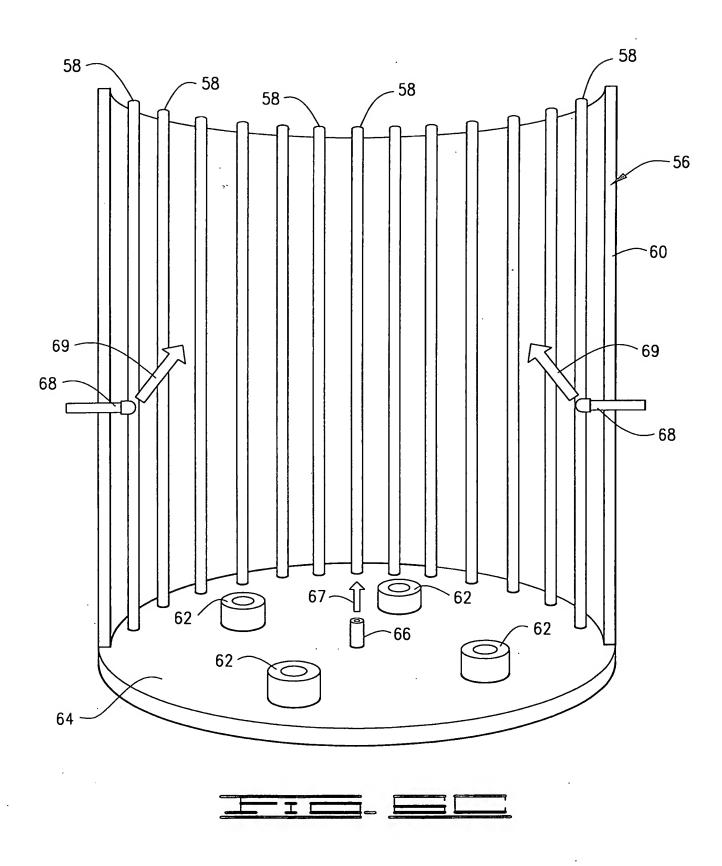





12/16

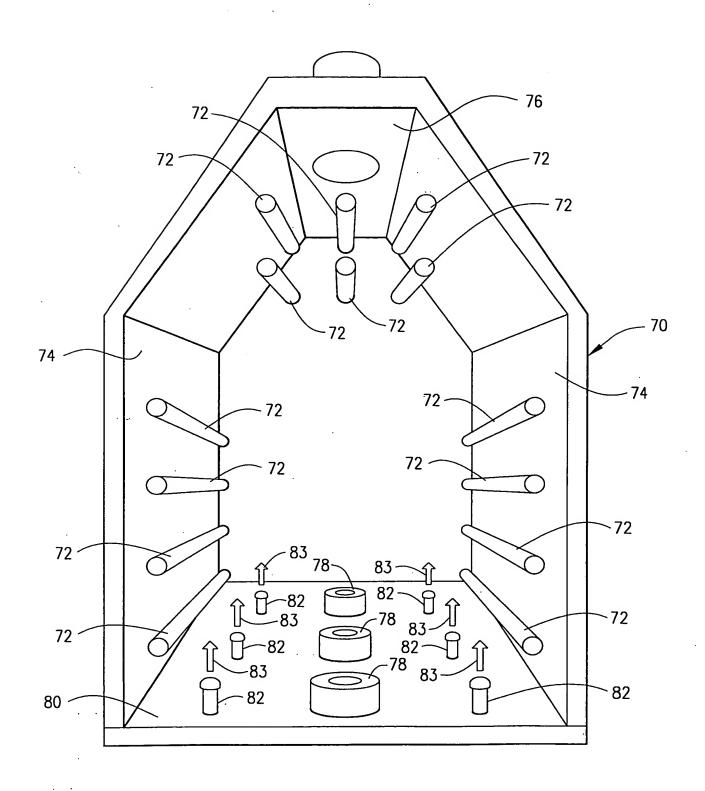





13/16

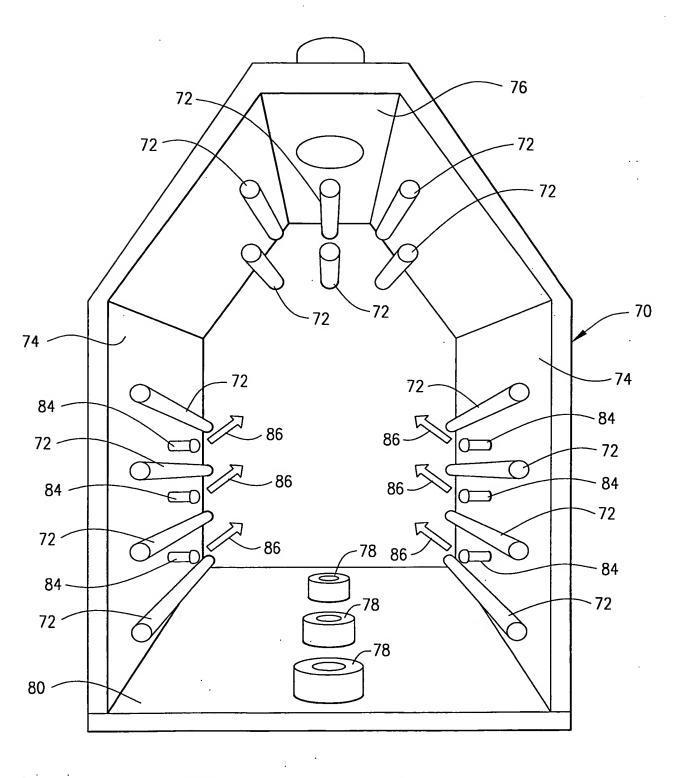




14/16

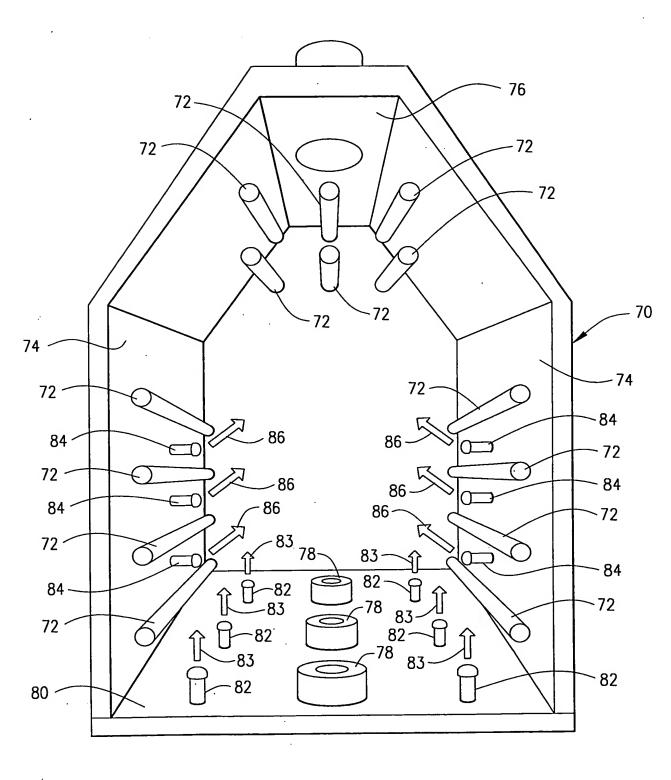




-|-

15/16

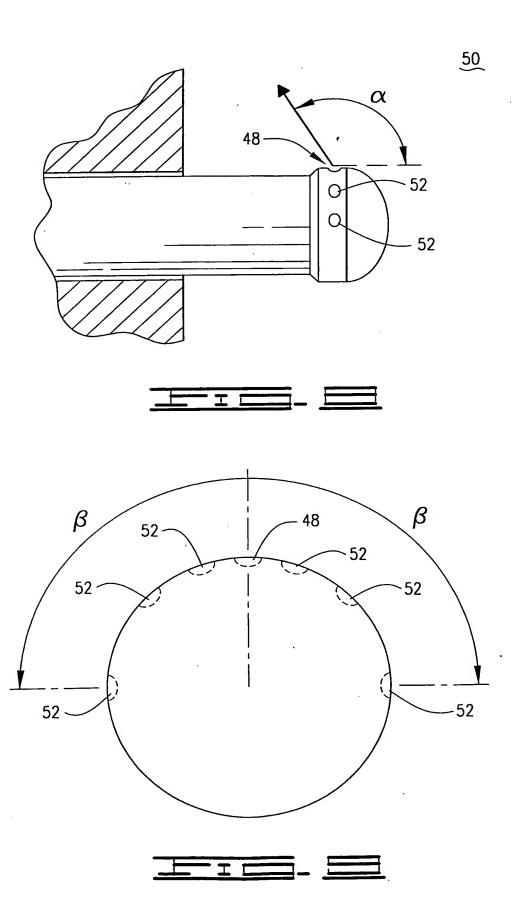

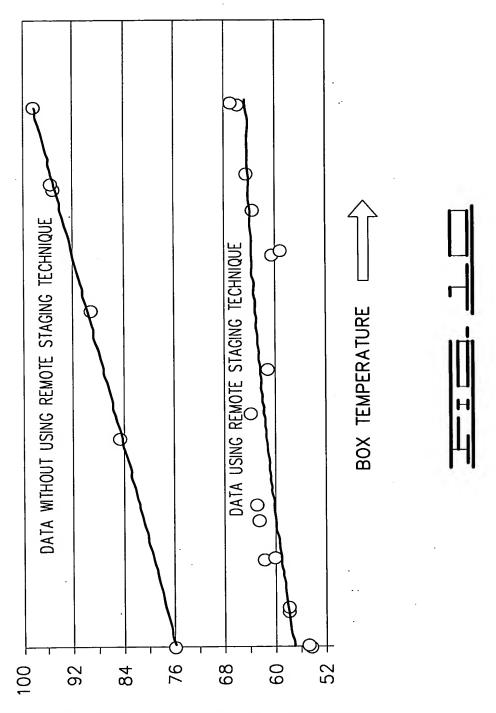

16/16

EXPRESS MAIL RECEIPT NO. EL975718846US REMOTE STAGED FURNACE BURNER CONFIGURATIONS AND METHODS Wesley R. Bussman, et al. (Atty Dkt. 31715-00060)